


Data Sheet

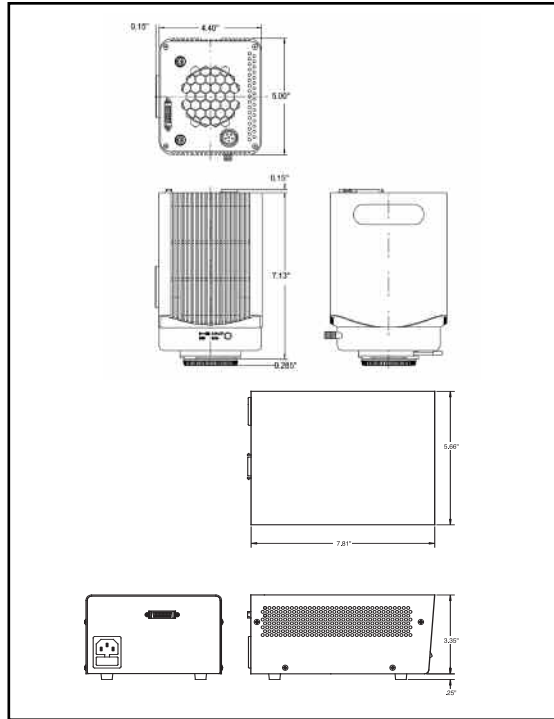

Application

The Pursuit™ Slider is a high speed 14-bit digital camera with the color filter on a slide mechanism, allowing the user to take high-resolution color and high sensitivity monochrome images by moving the slide. Its regulated cooling and multiple readout speeds make it ideal for quantitative applications like FRET, FRAP, live-cell imaging, FISH, and ion imaging.

Features	Benefits
----------	----------

Mode changing slide	Quantitative and qualitative modes in a single camera
-10°C regulated cooling via two-stage Peltier thermoelectric cooler	Reduces dark noise and increases repeatability for long exposure image capture
4 Mpixel CCD with 21.4 mm diagonal	Provides field of view that closely matches that in the microscope eyepieces without the need for expensive optical couplers
Multiple readout speeds	Allows the user to select between high speed and low noise image captures
Programmable gain	Facilitates live mode previews of low light specimens
40 MHz live mode (dual channel 20 MHz) ..	High-speed imaging for real time viewing
14 bit image capture	Extra bit depth is ideal for image enhancement
Interline progressive scan CCD	Electronic shuttering eliminates mechanical shutter shortcomings related to speed, wear, and vibration
Exposure while downloading	Allows user to overlap exposure with previous image download to improve speed
SPOT™ Software	Provides essential tools for modern microscopy and is widely supported by 3rd party software companies for high end applications as well as providing DLL with SDK for OEM Driver development
Mac® & Windows® operating systems	


Pursuit™ Slider



Data Sheet

DIAGNOSTIC
INSTRUMENTS, INC.
SOURCE
THE SOLUTION

Pursuit™ Slider

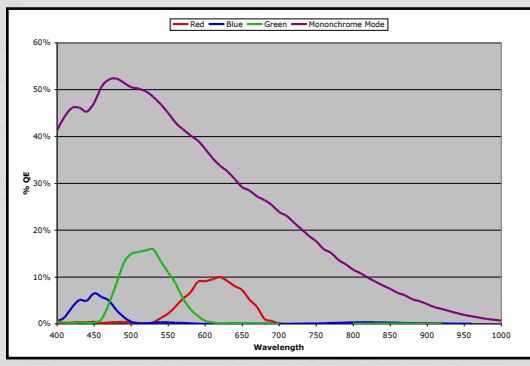

CCD information:

Kodak KAI-4021-M with cover glass
 Monochrome progressive scan interline CCD
 2048 x 2048, 7.4 μm square pixels
 15.16 x 15.16 mm active area, >1" optical format
 300x anti-blooming
 LCD electronic RGB color changing filter with IR filter

Cooling:

-10° regulated cooling via three-stage Peltier thermoelectric cooler; -40° C maximum differential from ambient

Digitization information:

Digitized pixel by pixel at CCD sensor
 Live mode: 8 bit x 40 MHz (Dual channel)
 8 bit x 20MHz)
 Live image frame rate: 11 f/s without binning; up to 17 f/s with binning
 Nonlinearity: <1% (gain 1)
 Capture mode: 14 bit (10 and 20 Mhz selectable)
 A/D Converter full scale set to 30,000 e (no binning); 60,000 e (with binning)
 Saved bit depths: 8, 12 or 16 bit BW, 24, 36 or 48 bit RGB

Noise specifications:

Read noise: 9 e at 10 Mhz, 12 e at 20 Mhz
 Dark current: 0.022 e/p/s

Exposure:

No maximum exposure; 1 ms minimum exposure
 Captured and live mode automatic exposure
 Captured and live mode manual exposure

Lens mount: Nikon F-mount

Sealing window: Multilayer anti-reflection coating

Computer interface: PCI bus card

External device control: TTL level output with programmable delay

External trigger input: TTL level input with programmable delay

Mechanical:

Tripod mount: 1/4 - 20 UNC
Camera head: 5.00" (127 mm) x 4.40" (112 mm) x 7.13" (181 mm), 4.55 lbs. (2.1 kg)
Power supply: 3.61" (92 mm) x 3.90" (99 mm) x 8.13" (207 mm), 3.2 lbs. (1.5kg)
Operating environment: 0 to 30° C ambient, 0-80% relative humidity noncondensing

Captured Frames per Second*

Binning	REGION OF INTEREST			
	2048 X 2048	1600 X 1600	512 X 512	256 X 256
1 x 1	3.8	6.2	10.7	14.5
2 x 2	6.9	9.7	14.5	17.7
3 x 3	8.9	11.9	16.5	18.3
4 x 4	10.4	13.6	17.6	19.9
8 x 8	13.9	16.9	19.7	21.2

*1 ms exposure, 20 Mhz readout with post-processing deferred, taken with 1 Ghz PIII processor running Windows XP

Power requirements: 100-240 VAC, 3 A

SPOT software features:

Color live mode viewing window & controls, auto-exposure live and capture modes, image capture window, predefined and custom image setups, auto white balance, flat field correction, image enhancement tools in three color spaces (RGB, HSL, HSV), pan and zoom windows, multiple customizable floating taskbars, spot metering, non-destructive annotations, non-destructive calibration marks, measurement tools, sequential image capture and playback, exportable image archiving database (PC only), report generator, macro scripting, interactive print dialog, online help menu, Correct Color Technology™.

File formats:

Bitmap, TIFF, TIFF-JPEG, JPEG-2000, PICT, AVI (PC, export only), Quicktime (Mac, export only)

TIFF File sizes:

8 bit BW / 4 MB 24 bit RGB / 12 MB
 12 bit BW / 6 MB 36 bit RGB / 18 MB
 16 bit BW / 8 MB 48 bit RGB / 24 MB

Drivers included:

Twain for supported Windows® operating systems
 AppleEvent for supported Mac® operating systems

Native drivers for 3rd party software:

Call or visit our website (www.diaginc.com)

Minimum system requirements:

Full height, half length PCI bus slot or PCI-MCA CardBus slot*

*-Requires Magma™ Adapter (sold separately)

PC: Pentium 400 or greater w/
 Windows 98, 98SE, 2000, ME, or XP

Mac: 400 Mhz G3 - OS 10.2.8 or higher

RAM: 256 MB

Video card: 24 bit RGB @ desired resolution

Items included: Camera head, PCI plug-in board, data cable, power supply cable, power supply, power cord, SPOT software install CD (includes drivers), software user guide, hardware user guide, and 2 year warranty
 Mac® is a registered trademark of Apple Computers, Inc.
 Windows® is a registered trademark of Microsoft.
 Specifications are typical and subject to change without notice.
 Ambient temperature is defined as 20° C.

Catalog Number: PR1640

