



TAKE PICTURES. FURTHER.™



8660 Thermal Printer

KODAK PROFESSIONAL 8660 Thermal Printer
Superior color. Durable performance. Outstanding prints.




Deliver true professional quality photographic prints that last. Whether it 's in a professional studio, theme park or at the mall—indoors or out, the KODAK PROFESSIONAL 8660 Thermal Printer gives you the quality, consistency, durability and reliability you need. This latest printer in the award-winning 8600 thermal dye printer line is ideal for independent photographers and studios doing digital portraiture, event photography and retail studios. Its cast metal frame was designed for rugged use to provide you with the dependable performance vital to your business. The 8660 printer produces 5 x 7-inch or 8 x 10-inch laminated prints in just over a minute and, unlike inkjet, require no post-processing to ensure image stability. With KODAK PROFESSIONAL EKTATHERM XTRALIFE Matte Three-Color Ribbon, the 8660 printer can deliver matte finish output at your fingertips. Matte that is comparable to N-surface prints. No compromises—just quality.

- True photographic quality: the look and feel of traditional prints
- Matte and gloss finishes
- Multiple output sizes & package templates
- Rugged cast metal frame—high reliability
- Simple loading
- Easy network connectivity options
- Enclosed design for highest quality prints

Kodak Professional

8660 Thermal Printer

KODAK PROFESSIONAL 8660 Thermal Printer

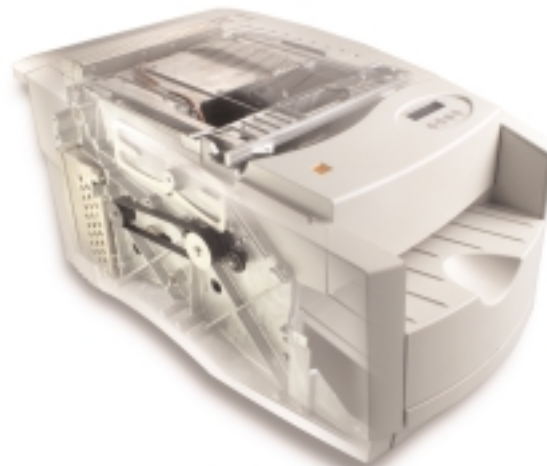

Only the 8660 Thermal Printer has a rugged cast metal frame for reliability and long life.

Printer Specifications

- Printing process: Thermal dye diffusion
- Processor: 133 MHz 68040 RISC
- Print resolution: 300 pixels-per-inch continuous-tone
- Print time: 80 seconds, including lamination
- Maximum imageable area using oversize ribbon, 8.27 x 12.5 inches
- Maximum imageable area using medium-format ribbon, 5 x 8 inches

Computer Interface

- SCSI (2 ports), IEEE 1284 PARALLEL
- Optional Network Interface Card supports NIC, TCP/IP, IPX, ETHERTALK, NetBEUI, and DLC protocols

Printer Drivers and Fonts

- ADOBE PHOTOSHOP export plug-ins for MACINTOSH, WINDOWS 95/98/ME, and WINDOWS NT 4.0/2000 systems
- WINDOWS Raster Print Drivers for WINDOWS 95/98/ME and WINDOWS NT 4.0/2000 systems
- API Tool Kit available for developers

Physical Characteristics/

Operating Requirements

- Physical dimensions: 17" W x 26" D x 12" H (431 mm x 660 mm x 305 mm)
- Weight: 52.5 lb (23.8 kg); 80 lb boxed (36.3 kg)
- Operating temperature: 59 to 86°F (15 to 30°C)
- Relative humidity: 20 to 76%
- Automatically adjusts to input voltage of 90 to 250 V AC, 47 to 60 Hz
- Power consumption: 250 watts maximum

Agency Approvals

- UL 1950
- CSA C22.2 No. 950
- TUV EN60950

EMI

- FCC Part 15, Class B;
- ICES-003, Class B
- CE Mark for Residential, Commercial, and Light Industry
- VCCI, Class 2
- C-Tick Mark

Ordering Information

Printer	CAT No.
KODAK PROFESSIONAL 8660 Thermal Printer	191 3540
KODAK 10/100 Network Interface Card	844 5074
KODAK PROFESSIONAL 8660 Universal Tray	830 7266
KODAK PROFESSIONAL EKTATHERM XLS Print Papers	
Sizes	CAT No.
8.5 x 7"	834 5811
8.5 x 11"	861 4364
210 x 297 mm	881 6514
8.5 x 12"	868 4623
210 x 307 mm	875 1596
8.5 x 14"	856 5699
210 x 355 mm	807 5640
KODAK PROFESSIONAL EKTATHERM XLS Donor Ribbons	
	CAT No.
KODAK PROFESSIONAL EKTATHERM 3-Color Ribbon/CMY	187 9386
KODAK PROFESSIONAL EKTATHERM Oversize 3-Color Ribbon/CMY	138 9089
KODAK PROFESSIONAL EKTATHERM XTRALIFE Matte 3-Color Ribbon/CMYX	180 6033
KODAK PROFESSIONAL EKTATHERM XTRALIFE 3-Color Ribbon/CMYX	157 4417
KODAK PROFESSIONAL EKTATHERM XTRALIFE Oversize 3-Color Ribbon/CMYX	177 6525
KODAK PROFESSIONAL EKTATHERM XTRALIFE Medium Format Ribbon/CMYX	110 4728
KODAK PROFESSIONAL EKTATHERM XTRALIFE Black Ribbon/KX	166 3467

For Assistance

In the U.S., call 1-800-235 6325.
In Canada, call 1-800-465-6325.



Eastman Kodak Company
343 State Street
Rochester, New York 14650 USA