


ROLERA-XR *FAST1394*

High-Performance Near-Infrared IEEE 1394 FireWire™ Digital CCD Camera

The QImaging Rolera-XR digital camera is designed for high-resolution infrared and visible-range scientific and industrial imaging applications. The Rolera-XR spectral range extends to 1000nm in the IR region. High-speed, low-noise electronics provide linear digital data at frame rates up to 120 fps with binning and ROI. The IEEE 1394 FireWire™ digital interface allows ease of use and installation with a single wire. No framegrabber or external power supply is required. The Rolera-XR includes QCapture Pro software (Windows® and Mac OS) for real-time image preview and capture. A Software Development Kit (SDK) is available upon request for interfacing with custom software.

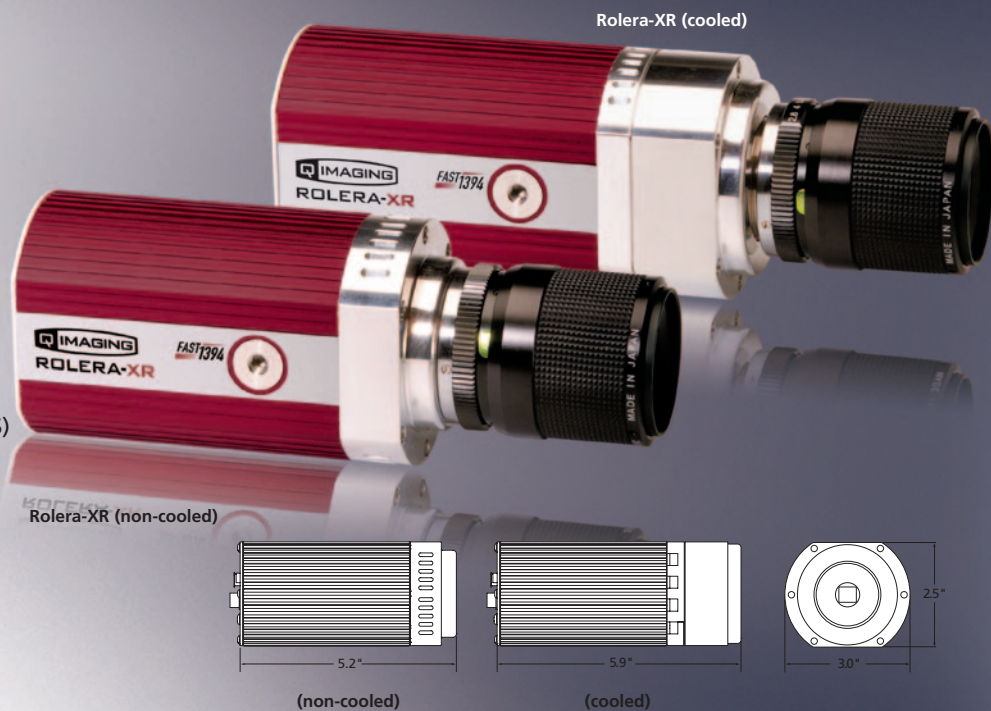

Note: Lens is shown for illustration only and is not included.

CAMERA MODELS

Includes: IEEE 1394 FireWire™ cable, IEEE 1394 PCI card, QCapture Pro, QCapture Suite software, & access to SDK

▪ **Monochrome Rolera-XR Cooled**

Model: ROL-XR-F-M-12-C

▪ **Monochrome Rolera-XR Non-Cooled**

Model: ROL-XR-F-M-12

CAMERA OPTIONS

▪ **Extended Warranty**

FEATURES

High Quantum Efficiency

Large Pixels (13.7µm x 13.7µm)

High-Speed Readout

Low-Noise Electronics

Flexible Exposure Control from 10µs to 17.9min

External Sync & Trigger

ROI (Region of Interest)

Binning

Extended IR Sensitivity

IEEE 1394 FireWire™
QImaging Fast 1394 Technology

BENEFITS

▪ Super high sensitivity for demanding low-light & IR imaging

▪ High sensitivity

▪ Previewing & focusing in real time
▪ 120fps with 2x2 binning & ROI
▪ 20fps full resolution

▪ Quantitation & imaging of low light levels

▪ Optimal integration over a wide range of light levels

▪ Tight synchronization with flashlamps, automated filters, shutters, & microscope stages

▪ Higher frame rates for precise analysis of rapidly changing specimens

▪ Increases sensitivity for quantitation & imaging of very low light levels
▪ Increases frame rate

▪ High-performance imaging outside the visible range


▪ Simple connectivity
▪ Ease of use & installation
▪ Portability with laptop computer
▪ Simultaneous use of multiple cameras through a single port
▪ Single-cable operation (no external power supply or control unit)

ROLERA-XR FAST 1394 SPECIFICATIONS

APPLICATIONS

- Real-Time, Low-Light Infrared Imaging
- IR-DIC
- Surveillance
- Low Light Level Fluorescence
- Wafer Inspection
- Live Cell Imaging

SPECTRAL RESPONSE

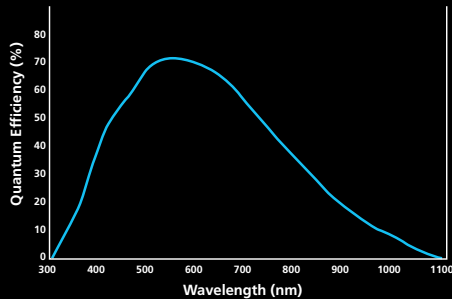

CCD SENSOR

Light-Sensitive Pixels	696 x 520
Binning Modes	2x2, 4x4, 8x8
ROI (Region of Interest)	From 1x1 pixels up to full resolution, continuously variable in single-pixel increments
Exposure/Integration Control	10 μ s to 17.9min in 1 μ s increments
Sensor Type	VQE3618L progressive-scan interline CCD (monochrome)
Pixel Size	13.7 μ m x 13.7 μ m
Linear Full Well	22,000e ⁻
Dark Current	1.78e ⁻ /pix/s (non-cooled)
Cooling Available	Yes (optional)
Cooling Type	Peltier thermoelectric cooling to 25°C below ambient
Digital Output	12 bits
Readout Frequency	20, 10, 5, 2.5MHz
Frame Rate	20fps full resolution @ 12 bits (205*fps maximum with binning and ROI functions)

CAMERA

Computer Platforms/Operating Systems	Windows® & Mac OS**
Digital Interface	IEEE 1394 FireWire™
Shutter Control	Electronic shutter, no moving parts
External Trigger	TTL Input
Trigger Types	Internal, Software, External
External Sync	TTL Output
Gain Control	1.0 to 45x
Offset Control	-2048 to 2047
Optical Interface	2/3", C-mount optical format
Threadmount	1/4" — 20 mount
Power Requirements	7W (non-cooled); 13W (cooled); 8-24V
Weight	635g (non-cooled); 915g (cooled);
Warranty	2 years
Operating Environment	0 to 50°C (32 to 122°F)
Storage Temperature	-10 to 60°C
Humidity	Less than 80% non-condensing at 35°C (95°F)
Color Filter Option	No

* Special order only. Standard model achieves 165fps.

**Refer to QImaging website for detailed listing of supported operating systems.

Note: Specifications are nominal and subject to change.

04-0010A-E



Tel 604.708.5061
 Fax 604.708.5081
 INFO@QIMAGING.COM
WWW.QIMAGING.COM

FireWire and Mac OS are trademarks of Apple Computer, Inc., registered in the U.S. and other countries. Windows is a registered trademark of Microsoft Corporation in the United States and other countries. Other brand and product names are the trademarks or registered trademarks of their respective owners and manufacturers.